


Koten

Generating Power
SOLUTIONS



Koten Power
www.kotenpower.com

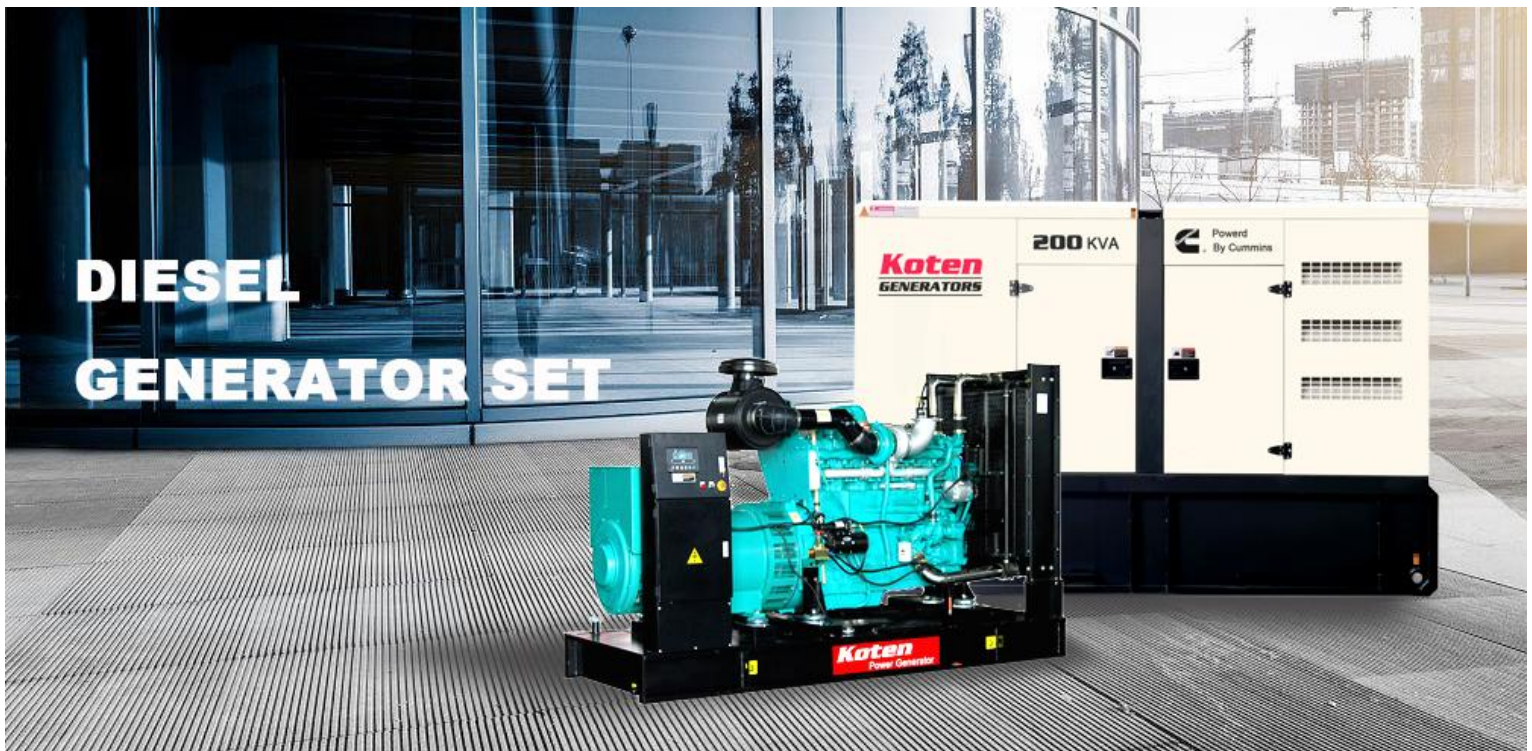

50Hz

400V

3PH

20 ~ 150kVA

3Phase Genset Specification 400/230V 50HZ/1500RPM					Engine Specification				Alternator	Silent Type		
Genset Model	PRP		ESP		Engine Model	Engine Prime Power	Cyl	Gov	Displacement (L)	Chinese Alternator	Dim (mm)	G.W. (Kgs)
	kW	Kva	kW	Kva								
KDC-20	16	20	18	22	4B3.9-G11	20	4	Electronic	3.9	PI 144D	2100*960*1300	850
KDC-23	18	23	20	25	4B3.9-G11	20	4	Electronic	3.9	PI 144D	2100*960*1300	850
KDC-25	20	25	22	28	4B3.9-G1	24	4	Mechanical	3.9	PI 144E	2100*960*1300	900
KDC-25	20	25	22	28	4B3.9-G2	24	4	Electronic	3.9	PI 144E	2100*960*1300	900
KDC-28	22	28	24	30	4B3.9-G1	24	4	Mechanical	3.9	PI 144F	2100*960*1300	950
KDC-28	22	28	24	30	4B3.9-G2	24	4	Electronic	3.9	PI 144F	2100*960*1300	950
KDC-30	24	30	26	33	4B3.9-G12	27	4	Electronic	3.9	PI 144G	2100*960*1300	980
KDC-30	24	30	26	33	4BT3.9-G1	36	4	Mechanical	3.9	PI 144G	2300*960*1300	990
KDC-40	32	40	35	44	4BT3.9-G1	36	4	Mechanical	3.9	PI 144J	2300*960*1300	1000
KDC-40	32	40	35	44	4BT3.9-G2	36	4	Electronic	3.9	PI 144J	2300*960*1300	1000
KDC-50	40	50	44	55	4BTA3.9-G2	50	4	Electronic	3.9	UCI 224D	2300*960*1300	1130
KDC-56	45	56	48	60	4BTA3.9-G2	50	4	Electronic	3.9	UCI 224E	2300*960*1300	1150
KDC-60	48	60	53	66	4BTA3.9-G2	58	4	Electronic	3.9	UCI 224E	2300*960*1300	1150
KDC-73	58	73	64	80	4BTA3.9-G11	70	4	Electronic	3.9	UCI 224F	2400*960*1400	1200
KDC-80	64	80	70	88	4BTA3.9-G11	70		Electronic	3.9	UCI 224G	2400*960*1400	1200
KDC-94	75	94	80	100	6BT5.9-G1	86	6	Mechanical	5.9	UCI 274C	3000*1100*1680	1550
KDC-94	75	94	80	100	6BT5.9-G2	86	6	Electronic	5.9	UCI 274C	3000*1100*1680	1550
KDC-100	80	100	88	110	6BT5.9-G1	86	6	Mechanical	5.9	UCI 274C	3000*1100*1680	1550
KDC-100	80	100	88	110	6BT5.9-G2	86	6	Electronic	5.9	UCI 274C	3000*1100*1680	1550
KDC-100	80	100	88	110	6BT5.9-G2	96	6	Electronic	5.9	UCI 274C	3000*1100*1680	1550
KDC-113	90	113	100	125	6BTA5.9-G2	106	6	Electronic	5.9	UCI 274D	3000*1100*1680	1600
KDC-125	100	125	110	138	6BTA5.9-G2	106	6	Electronic	5.9	UCI 274D	3000*1100*1680	1600
KDC-125	100	125	110	138	6BTAA5.9-G2	120	6	Electronic	5.9	UCI 274D	3000*1100*1680	1600
KDC-138	110	138	120	150	6BTAA5.9-G2	120	6	Electronic	5.9	UCI 274E	3000*1100*1680	1750
KDC-150	120	150	132	165	6BTAA5.9-G12	140	6	Electronic	5.9	UCI 274F	3000*1100*1680	1800

Standard reference Conditions

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.



**Powered
By Cummins**

50Hz

400V

3PH

160 ~ 450kVA

3Phase Genset Specification 400/230V 50HZ/1500RPM					Engine Specification				Alternator	Silent Type		
Genset Model	PRP		ESP		Engine Model	Engine Prime Power	Cyl	Gov	Displacement (L)	Chinese Alternator	Dim (mm)	G.W. (Kgs)
	kW	Kva	kW	Kva								
KDC-160	128	160	140	175	6CTA8.3-G1	140	6	Mechanical	8.3	UCI 274F	3500*1260*1900	2300
KDC-160	128	160	140	175	6CTA8.3-G1	163	6	Mechanical	8.3	UCI 274F	3500*1260*1900	2300
KDC-180	144	180	160	200	6CTA8.3-G1	163	6	Mechanical	8.3	UCI 274G	3500*1260*1900	2350
KDC-180	144	180	160	200	6CTA8.3-G2	163	6	Electronic	8.3	UCI 274G	3500*1260*1900	2350
KDC-200	160	200	176	220	6CTAA8.3-G2	183	6	Electronic	8.3	UCI 274H	3500*1260*1900	2400
KDC-225	180	225	200	250	6LTAA8.9-G2	220	6	Electronic	8.9	UCDI 274J	3700*1260*2150	2600
KDC-250	200	250	220	275	6LTAA8.9-G2	220	6	Electronic	8.9	UCDI 274K	3700*1260*2150	2650
KDC-250	200	250	220	275	6LTAA8.9-G3	230	6	Electronic	8.9	UCDI 274K	3700*1260*2150	2750
KDC-275	220	275	240	300	6LTAA9.5-G3	250	6	Electronic	9.5	HCI 444C	3700*1260*2150	2800
KDC-300	240	300	264	330	6LTAA9.5-G1	290	6	Electronic	9.5	HCI 444D	3700*1260*2150	2850
KDC-313	250	313	280	350	6LTAA9.5-G1	290	6	Electronic	9.5	HCI 444ES	3700*1260*2150	2900
KDC-375	300	375	330	413	6ZTAA13-G3	340	6	Electronic	13	HCI 444FS	4500*1700*2230	4300
KDC-400	320	400	360	450	6ZTAA13-G2	390	6	Electronic	13	HCI 444F	4500*1700*2230	4500
KDC-438	350	438	384	480	6ZTAA13-G2	390	6	Electronic	13	HCI 544C	4500*1700*2230	4500
KDC-438	350	438	384	480	6ZTAA13-G4	400	6	Electronic	13	HCI 544C	4500*1700*2230	4500
KDC-450	360	450	400	500	QSZ13-G2	400	6	ECU	13	HCI 544C	4500*1700*2230	4650
KDC-500	400	500	440	550	QSZ13-G3	450	6	ECU	13	HCI 544C	4500*1700*2230	4650
KDC-375	300	375	330	413	QSZ13-G6	328	6	ECU	13	HCI 444FS	4500*1700*2230	4750
KDC-400	320	400	360	450	QSZ13-G7	367	6	ECU	13	HCI 444F	4500*1700*2230	4750
KDC-450	360	450	400	500	QSZ13-G5	411	6	ECU	13	HCI 544C	4500*1700*223v	4900

Standard reference Conditions

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.



60Hz

220V
3PH

23 ~ 160kVA

3Phase Genset Specification 220/127V 60Hz/1800RPM					Engine Specification				Alternator	Silent Type		
Genset Model	PRP		ESP		Engine Model	Engine Prime Power	Cyl	Gov	Displacement (L)	Chinese Alternator	Dim (mm)	G.W. (Kgs)
	kW	Kva	kW	Kva								
KDC-23	18	23	20	25	4B3.9-G11	23	4	Electronic	3.9	PI 144D	2100*960*1300	850
KDC-28	22	28	24	30	4B3.9-G11	23	4	Electronic	3.9	PI 144E	2100*960*1300	850
KDC-30	24	30	26	33	4B3.9-G2	30	4	Electronic	3.9	PI 144E	2100*960*1300	900
KDC-31	25	31	28	35	4B3.9-G12	33	4	Electronic	3.9	PI 144F	2100*960*1300	950
KDC-35	28	35	32	40	4B3.9-G12	33	4	Electronic	3.9	PI 144G	2100*960*1300	970
KDC-40	32	40	35	44	4B3.9-G12	33	4	Electronic	3.9	PI 144G	2100*960*1300	970
KDC-45	36	45	40	50	4BT3.9-G2	40	4	Electronic	3.9	PI 144J	2300*960*1400	1150
KDC-50	40	50	44	55	4BT3.9-G2	40	4	Electronic	3.9	PI 144K	2300*960*1400	1170
KDC-50	40	50	44	55	4BTA3.9-G2	60	4	Electronic	3.9	PI 144K	2300*960*1400	1170
KDC-60	48	60	53	66	4BTA3.9-G2	60	4	Electronic	3.9	UCI 224D	2300*960*1400	1220
KDC-68	54	68	60	75	4BTA3.9-G2/58	67	4	Electronic	3.9	UCI 224E	2300*960*1400	1220
KDC-90	72	90	80	100	4BTA3.9-G11	80	4	Electronic	3.9	UCI 224F	2400*960*1400	1260
KDC-100	80	100	88	110	4BTA3.9-G11	80	4	Electronic	3.9	UCI 224G	2400*960*1400	1275
KDC-100	80	100	88	110	6BT5.9-G2	100	6	Electronic	5.9	UCI 224G	3000*1100*1680	1550
KDC-113	90	113	100	125	6BT5.9-G2	100	6	Electronic	5.9	UCI 274C	3000*1100*1680	1570
KDC-125	100	125	110	138	6BT5.9-G2	110	6	Electronic	5.9	UCI 274D	3000*1100*1680	1590
KDC-125	100	125	110	138	6BT5.9-G2	115	6	Electronic	5.9	UCI 274D	3000*1100*1680	1590
KDC-138	110	138	120	150	6BTA5.9-G2	120	6	Electronic	5.9	UCI 274D	3000*1100*1680	1650
KDC-150	120	150	132	165	6BTAA5.9-G2	132	6	Electronic	5.9	UCI 274E	3000*1100*1680	1750
KDC-160	128	160	140	175	6BTAA5.9-G12	150	6	Electronic	5.9	UCI 274E	3000*1100*1680	1750

Standard reference Conditions

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

 **Powered
By Cummins**



60Hz

220V

3PH

180 ~ 500kVA

3Phase Genset Specification 127/220V 60HZ/1800RPM					Engine Specification				Alternator	Silent Type		
Genset Model	PRP		ESP		Engine Model	Engine Prime Power	Cyl	Gov	Displacement (L)	Chinese Alternator	Dim (mm)	G.W. (Kgs)
	kW	Kva	kW	Kva								
KDC-180	144	180	165	200	6CTA8.3-G2	170	6	Electronic	8.3	UCI 274F	3500*1260*1900	2300
KDC-200	160	200	176	220	6CTAA8.3-G2	190	6	Electronic	8.3	UCI 274G	3500*1260*1900	2300
KDC-250	200	250	220	275	6LTAA8.9-G2	235	6	Electronic	8.9	UCI 274H	3700*1260*2150	2600
KDC-275	220	275	240	300	6LTAA8.9-G2	235	6	Electronic	8.9	UCDI 274J	3700*1260*2150	2600
KDC-275	220	275	240	300	6LTAA8.9-G3	255	6	Electronic	8.9	UCDI 274J	3700*1260*2150	2730
KDC-300	240	300	264	330	6LTAA9.5-G3	265	6	Electronic	9.5	UCDI 274K	3700*1260*2150	2850
KDC-300	240	300	264	330	6LTAA9.5-G1	280	6	Electronic	9.5	UCDI 274K	3700*1260*2150	2930
KDC-313	250	313	280	350	6LTAA9.5-G1	280	6	Electronic	9.5	HCI 444C	3700*1260*2150	2930
KDC-375	300	375	330	412.5	6ZTAA13-G3	340	6	Electronic	13	HCI 444ES	4500*1700*2230	4300
KDC-400	320	400	360	450	6ZTAA13-G2	390	6	Electronic	13	HCI 444E	4500*1700*2230	4320
KDC-438	350	438	380	475	6ZTAA13-G2	390	6	Electronic	13	HCI 444FS	4500*1700*2230	4500
KDC-438	350	438	380	475	6ZTAA13-G4	400	6	Electronic	13	HCI 444FS	4500*1700*2230	4500
KDC-450	360	450	400	500	QSZ13-G2	400	6	Electronic	13	HCI 444FS	4500*1700*2230	4500
KDC-500	400	500	440	550	QSZ13-G3	450	6	Electronic	13	HCI 444F	4500*1700*2230	4570
KDC-400	320	400	360	450	QSZ13-G6	360	6	Electronic	13	HCI 444E	4500*1700*2230	4590
KDC-450	360	450	400	500	QSZ13-G7	409	6	Electronic	13	HCI 444FS	4500*1700*2230	4620
KDC-500	400	500	440	550	QSZ13-G5	437	6	Electronic	13	HCI 444F	4500*1700*2230	4620

Standard reference Conditions

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.